


Wraparound boxes – KS 11

Folding instructions

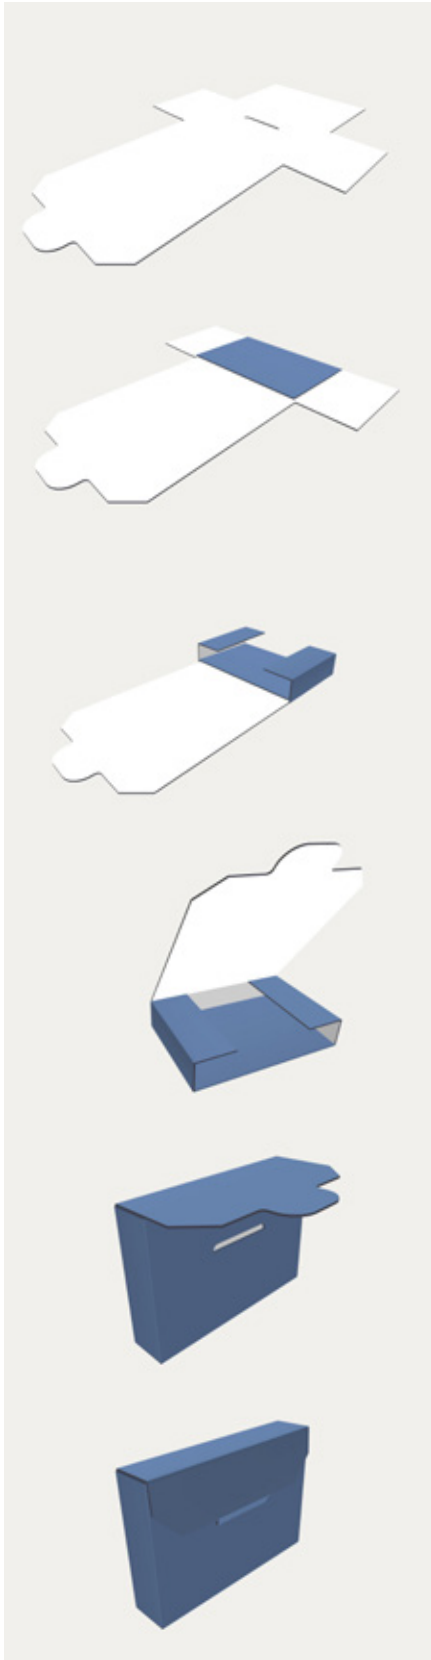

1. The precut pattern of your wraparound box should be placed on the table with the natural white coloured side facing towards you.
2. Fold all the prefluted edges vertically at a 90 degree angle, once facing upwards and thereafter back again.
3. Set up the side segments of your box right-angled. Bend the double-walled side segments inwards over the edges.
4. Please pay particular attention to the spigot (double-fold) while folding the base of the box.
5. Fold the base of the box with the light grey side becoming apparent (should be visible). Set the side segments upright and fold them towards the interior of the box.
6. Fold the longer side of the box. Now fit the flap into the opening slit provided in order to close the box.

We have manufactured your product with utmost care and accuracy.

Should you still have difficulties in folding your box, please do not hesitate to contact us. We will gladly assist you.

Please visit the following site for the animated version of the folding instructions:

<http://www.movies.klug-conservation.com>

KLUG-CONSERVATION

Zollstraße 2

87509 Immenstadt/Germany

Tel. +49 (0)8323 9653 30

www.klug-conservation.com

