


## Two-piece boxes – KS 12

Folding instructions

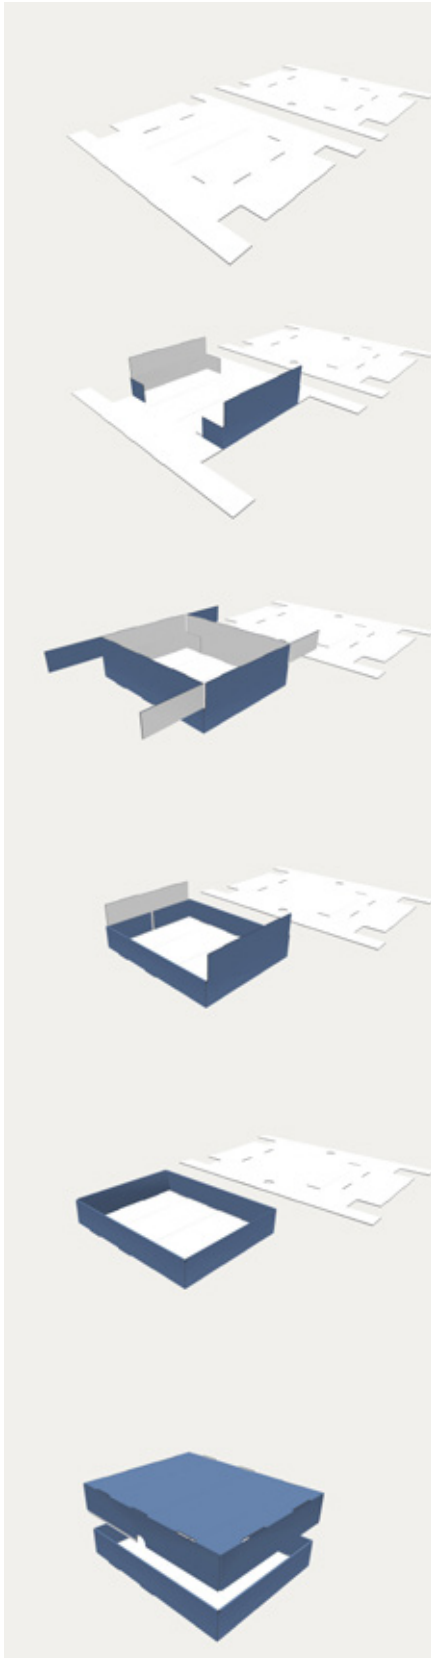

1. The precut pattern cuttings of your box should be placed on the table with the natural white coloured side facing towards you.
2. Fold all the prefluted edges vertically at a 90 degree angle, once facing upwards and thereafter back again.
3. Set up the side segments of your box right-angled. Bend the double-walled side segments inwards over the edges. Please pay particular attention to the spigots (double-folds).
4. Set up the shorter side segments of the box right-angled. Fold the segments of the longer side over the flaps of the shorter side, which have already been set upright. The flaps of the longer side are thereby facing outwards. The side segments should now snap into the slits provided. The shorter side segments are now folded over the flaps of the side segments of the longer side, so that these flaps snap in as well.
5. Proceed in the same way with the lid of the box.
6. Now after having folded both parts of the box, base and lid, you may put the two parts of the box together.

*We have manufactured your product with utmost care and accuracy.*

*Should you still have difficulties in folding your box, please do not hesitate to contact us. We will gladly assist you.*

*Please visit the following site for the animated version of the folding instructions:*

*[http: www.movies.klug-conservation.com](http://www.movies.klug-conservation.com)*

### KLUG-CONSERVATION

Zollstraße 2

87509 Immenstadt/Germany

Tel. +49 (0)8323 9653 30

[www.klug-conservation.com](http://www.klug-conservation.com)

