


## Technical data sheet

Archival board 047 – grey-blue (single ply 185 gsm)

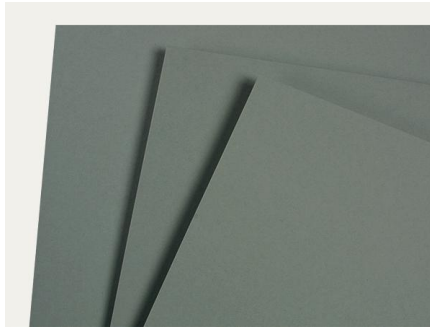

### Specifications:

A grey-blue, solid colour (dyed throughout) board with a specially treated top surface, dirt-resistant, erasable and rub-proof (dry wiping). Excellent grooving/creasing characteristics due to high long-fibre content.

### Sizes ex-stock:

100 x 140 cm

### Material characteristics:

#### Board

- 100% bleached cellulose
- without the usage of recycling fibres
- free of wooden fibres
- Kappa level < 5 = lignin-free
- pH 7.5 - 10.0 = acid-free (in accordance with ISO 6588-1:2020)
- alkaline buffer > 3% natural calcium carbonate (GCC)
- sizing: neutral/synthetic (without alum additive)
- sizing according to Cobb<sub>60</sub> < 25
- without optical brightening agents
- light-fastness approx. 7 – 8 (= extremely good) in accordance with the wool scale (EN ISO 105-B02)
- no bleeding in accordance with DIN ISO 16245:2012
- special surface strengthening (dirt-resistant and erasable)
- Photographic Activity Test (PAT) passed in accordance with ISO 18916:2007

### This quality corresponds to the technological basis of the following standards:

#### DIN EN ISO 9706

Information and documentation – Paper for documents – Requirements for permanence

#### DIN ISO 16245 - type A

Information and documentation – Boxes, file covers and other enclosures, made from cellulosic materials, for storage of paper and parchment documents.

#### NF Z 40-014

Requirements and criteria for selecting paper and cardboard for conserving paper and parchment documents

#### ANSI/ NISO Z.39.48

American National Standard for Permanence of Paper for Publications and Documents in Libraries and Archives

#### DIN 6738:2007

Highest level of permanency LDK 24-85

Further information, such as our Quality Guarantee, certificates of independent testing institutions and information regarding application methods and instructions are stated on our website [klug-conservation.com](http://klug-conservation.com).