


## Technical data sheet

Blotting board 040 – natural white 350 gsm

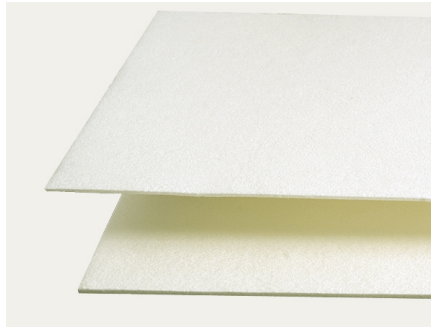

|                                  |   |
|----------------------------------|---|
| <b>Specifications:</b>           | A highly absorbent acid-free and soft-textured fleece board with good wet-strength and a high cotton fibre content, suitable for preservation and archival storage purposes. The board is pH-neutral, and is manufactured without an alkaline buffer (unbuffered) and without the use of optical brightening agents.  |
| <b>Sizes ex-stock:</b>           | 27.56 x 39.37, 39.37 x 55.12  |
| <b>Scope of application:</b>     | Suitable for preservation and archival storage purposes   |
| <b>Material characteristics:</b> | <b>Board</b> <ul style="list-style-type: none"><li>• approx. 60% cotton pulp and approx. 40% bleached pulp</li><li>• pH level during manufacture approx. 7.0</li><li>• acid-free</li><li>• without an alkaline buffer (unbuffered)</li><li>• without optical brightening agents</li><li>• capillary rise (migration distance 155 - 175 mm/10 min (DIN 53106))</li></ul> |
| <b>Remarks:</b>                  | Please note that cuttings are not possible!   |

Further information, such as our Quality Guarantee, certificates of independent testing institutions and information regarding application methods and instructions are stated on our website [klug-conservation.com](http://klug-conservation.com).