


Slipcase KS 5

Product information

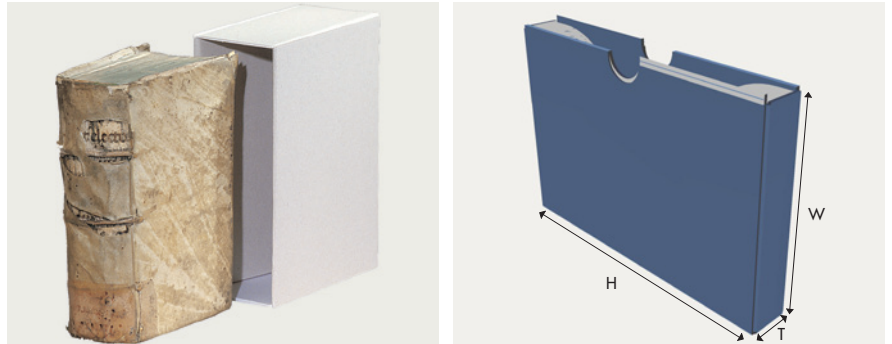

H = Height, T = Thickness, W = Width

Description:

A classical, standard slipcase for books with a visible spine. Available with or without a finger hole. Delivered either as a folding construction with self-locking tabs (slits) or pre-stuck (pasted).

Material characteristics:

Slipcases are manufactured from our standard assortment of corrugated MW 1.6, MW 1.7 and MW 1.8, ageing resistant and with guaranteed permanency in accordance with ISO 9706. The slipcase can also be made from other material types, including solid board.

Base paper

- 100 % bleached cellulose (alpha cellulose)
- Without the usage of recycled fibres
- Free of wooden fibres
- Kappa level 1 – 2 = lignin-free
- pH-value 8.0 – 9.5 = acid-free (in accordance with ISO 6588-1:2005)
- Alkaline reserve (buffer) > 2 % natural calcium carbonate (GCC)
- Sizing: neutral/synthetic (without alum additive)
- Without optical brighteners (OBA-free)
- Photographic Activity Test (PAT) passed in accordance with ISO 18916:2009

Glue used for the corrugated board

- Native potato starch
- pH-value > 8.0
- Glued moisture-proof (wet-strengthened)

Further information, such as our „Quality Guarantee“, certificates of independent testing institutions and information regarding application methods and instructions are stated on our website klug-conservation.com.